


RUSTIC CEDAR 9 SUMMARY INSTALLATION GUIDE




CAUTION: ALWAYS INSTALL PRODUCT FROM LEFT TO RIGHT AND REMEMBER THAT POLYMER UNDERGOES EXPANSION/CONTRACTION DUE TO TEMPERATURE VARIATIONS. FOR A BETTER LOOK WE RECOMMAND TO INSTALL PRODUCT ON FLAT SURFACES (EX: PLYWOOD PANELS OR OSB PANELS). IF SECTIONS ARE INSTALLED ON A WALL WITH FURRINGS, FURRING STRIPS MUST BE INSTALLED **OBLIQUELY AND SPACED BY 8"(20,32CM).**

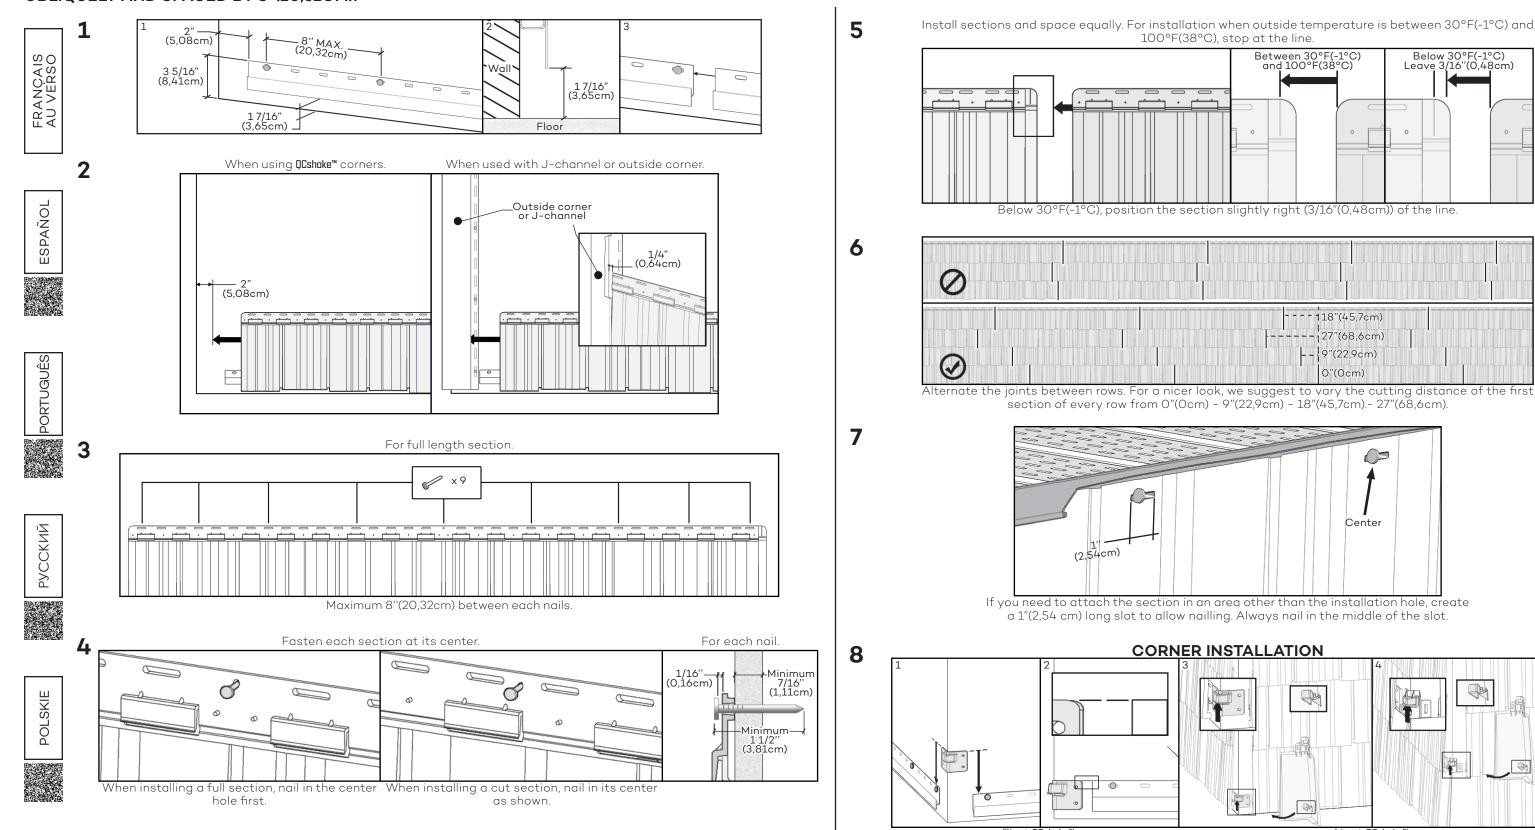

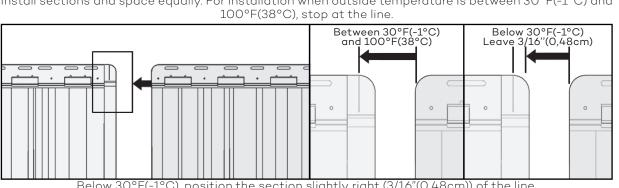


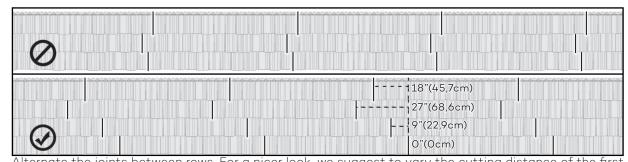

Alternate the joints between rows. For a nicer look, we suggest to vary the cutting distance of the first section of every row from 0"(0cm) - 9"(22,9cm) - 18"(45,7cm).- 27"(68,6cm).

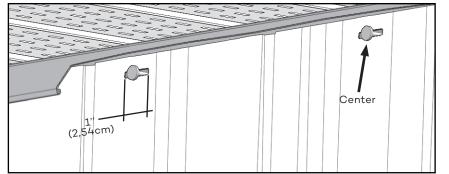

If you need to attach the section in an area other than the installation hole, create a 1"(2,54 cm) long slot to allow nailling. Always nail in the middle of the slot.

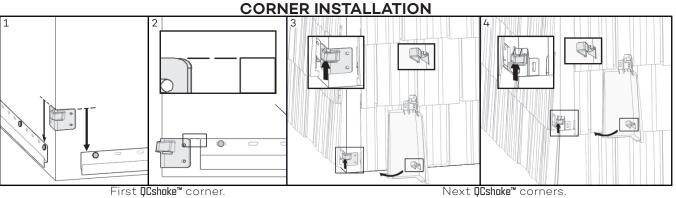

See **QCshake.com** for the complete installation guide.

